



ROCH ALESOMETER with Analogue Indication - Metric

Internal micrometers with 3-line contact. All ROCH ALESOMETER let you measure not only through bores but also blind bores as well as centring shoulders, except for the models covering the application ranges from 6 up to 10 mm.

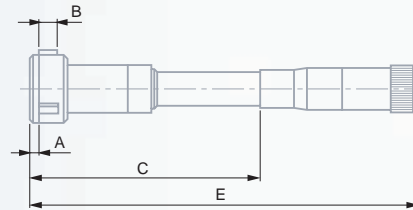

NF E 11-099.
Type 1 for models 6 to 10 mm or 2 for all other models

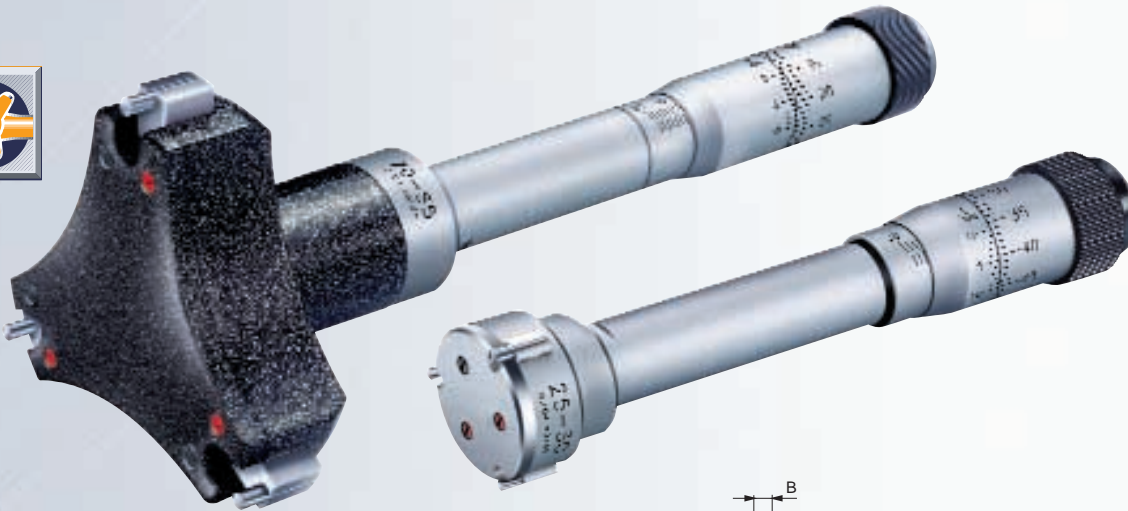

Models 6 to 100 mm with vernier reading



Measuring inserts for application ranges

6 to 10 mm: steel hardened to 30 550 HV

10 to 300 mm: tungsten carbide tipped. Hardness: ≥ 70 HRC.



Wood case



Identification number



Declaration of conformity



Calibration certificate available on request

Single Instruments, complete

					Bmm	Cmm	Emm
08.1725001	6 ÷ 8	0,001	4	1,2	3	54,5	107
08.1725003	8 ÷ 10	0,001	4	1,2	3	54,5	107
08.1725006	10 ÷ 12,5	0,001	4	0	6,5	64,5	117
08.1725008	12,5 ÷ 15	0,001	4	0	6,5	64,5	117
08.1725010	15 ÷ 17,5	0,001	4	0	6,8	64,5	117
08.1725012	17,5 ÷ 20	0,001	4	0	6,8	64,5	117
08.1725014	20 ÷ 25	0,001	4	0	8,5	70	122,5
08.1725016	25 ÷ 30	0,001	4	0	8,5	70	122,5
08.1725018	30 ÷ 35	0,001	4	0	8,5	70	122,5
08.1725020	35 ÷ 40	0,001	4	0	8,5	70	122,5
08.1725022	40 ÷ 50	0,001	4	0	14,5	108,7	188,7
08.1725024	50 ÷ 60	0,001	5	0	14,5	108,7	188,7
08.1725026	60 ÷ 70	0,001	5	0	14,5	108,7	188,7
08.1725028	70 ÷ 85	0,001	5	0	14,5	126,7	206,7
08.1725030	85 ÷ 100	0,001	5	0	14,5	126,7	206,7
08.1725032	100 ÷ 125	0,01	7	0	30	153,7	233,5
08.1725034	125 ÷ 150	0,01	7	0	30	153,7	233,5
08.1725036	150 ÷ 175	0,01	8	0	30	153,7	233,5
08.1725038	175 ÷ 200	0,01	8	0	30	153,7	233,5
08.1725040	200 ÷ 225	0,01	9	0	30	153,7	233,5
08.1725042	225 ÷ 250	0,01	9	0	30	153,7	233,5
08.1725044	250 ÷ 275	0,01	9	0	30	153,7	233,5
08.1725046	275 ÷ 300	0,01	9	0	30	153,7	233,5

* Not applicable to the models from 10 mm since the measuring inserts are close to the instrument's front face.