
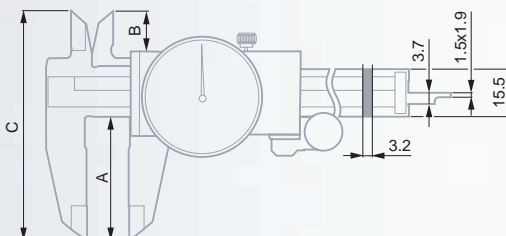


Models ETALON® 125

Slider with metal dial housing – 1 mm per pointer revolution.

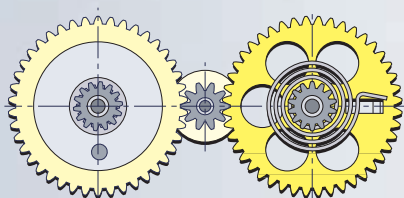

DIN 862 (Style 1AR)

≤100 mm: 20 µm
>100 mm: 30 µm

Hardened stainless steel

32 mm diameter rotating dial with lock

Slider with locking screw

Steel gear mechanism, hardened and ground.

Patented shockproof design

Suited plastic case

Identification number

Inspection report with a declaration of conformity



75.115821	0 ÷ 150 mm	0,02 mm	1 mm	without wheel drive
75.115811	0 ÷ 6 in	0.001 in	0.1 in	with wheel drive
75.116550	0 ÷ 6 in	0.001 in	0.1 in	with wheel drive, black face and white scale numbering

Optional Accessory

05.60013 Depth measuring foot (also see on page A-25).

