


● TESA® ISOMASTER® Standard Models with Analogue Indication

Slanted full millimetres on the barrel are set apart from the straight half millimetres to virtually eliminate reading errors.

The knurled sleeve needs only be reversed to render the friction drive built into the thimble inactive.

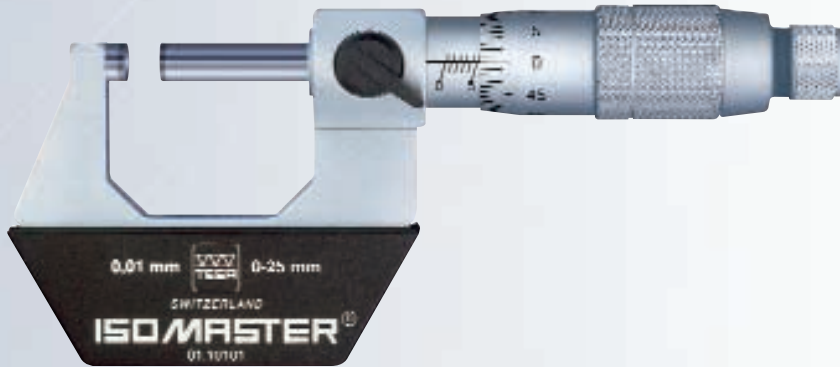

DIN 863 T1
NF E 11-095

Tungsten
carbide tipped

≤ 100 mm:
6,5 mm dia.
> 100 ≤ 300: 8 mm dia.

0,5 mm

Max. 10 N

Plastic case

Identification
number

Inspection
report with a
declaration of conformity

No	mm	mm	No	in	in
01.10101	0 ÷ 25	0,01	01.20101	0 ÷ 1	0.0001
01.10102	25 ÷ 50	0,01	01.20102	1 ÷ 2	0.0001
01.10103	50 ÷ 75	0,01	01.20103	2 ÷ 3	0.0001
01.10104	75 ÷ 100	0,01	01.20104	3 ÷ 4	0.0001
01.10105	100 ÷ 125	0,01			
01.10106	125 ÷ 150	0,01			
01.10107	150 ÷ 175	0,01			
01.10108	175 ÷ 200	0,01			
01.10109	200 ÷ 225	0,01			
01.10110	225 ÷ 250	0,01			
01.10111	250 ÷ 275	0,01			
01.10112	275 ÷ 300	0,01			

● Set of 4 TESA® ISOMASTER®

Same execution as above.

The models covering the application range 0 to 100 mm provide the quality that you need at competitive prices.



01.10113



0 ÷ 100



Plastic case