

TESA® YR Precision Dial Gauges

82 mm Dial Diameter, 0,01 mm Reading

Precision mechanism with both a ground toothed rack made from hardened stainless steel and sturdy gear drive.



DIN 878
NF E 11-050
ISO/R 463



0,01 mm



2,3 mm



Rotating dial



Full-metal case housing

Fixing shank and plunger in hardened stainless steel



High performance shockproof system in both directions



M2,5 thread for the measuring insert



Accuracy: see table on page E-10



See table on page E-10



3 mm dia. ball tip already mounted




Cardboard box



Identification number



Inspection report with a declaration of conformity

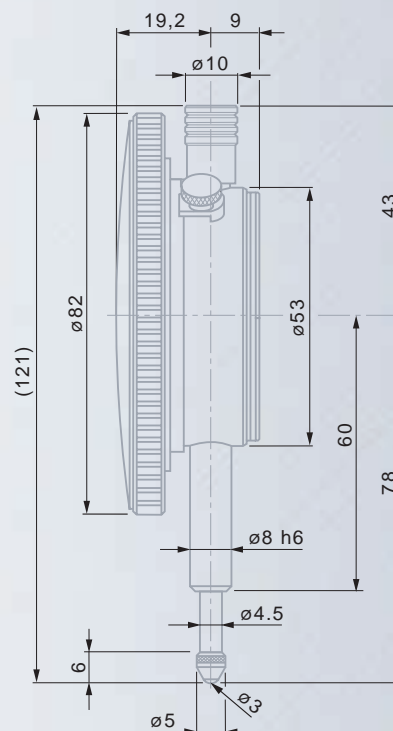

mm



mm



mm



mm



Regular models

14.10910	0,01	10	10,5	with	1	0 ÷ 50 ÷ 100	can be locked
14.10911	0,01	10	10,5	with	1	0 ÷ 50 ÷ 0	can be locked